
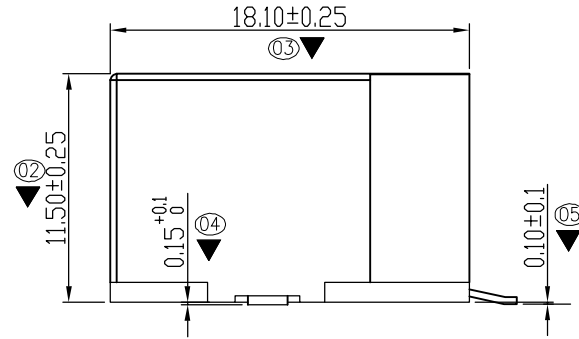


REV.	ECN. NO.	NAME	DATA
AO	NEW	MIN-D	2017-04-27

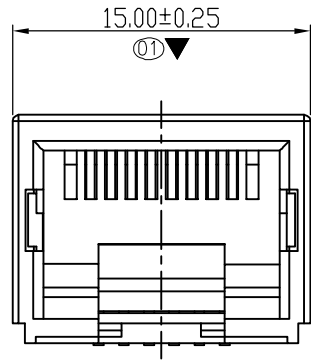

**ELECTRICAL:**

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 40mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩMIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE



**MECHANICAL:**

1. HOUSING MATERIAL: THERMOPLASTIC, UL94V-0 RATED, COLOR BLACK.
2. CONTACT MATERIAL: PHOSPHOR BRONZE C5191-H T=0.30MM
3. PLATING: GOLD PLATING OVER NICKEL IN CONTACT. TIN PLATING OVER NICKEL IN SOLDER AREA.
4. OPERATING LIFE: 750 CYCLES MIN.

**ENVIRONMENTAL:**

1. STORAGE: -40°C TO +85°C
2. OPERATION: -40°C TO +70°C

标有“◎▼”号为重点管控及首件检测尺寸。

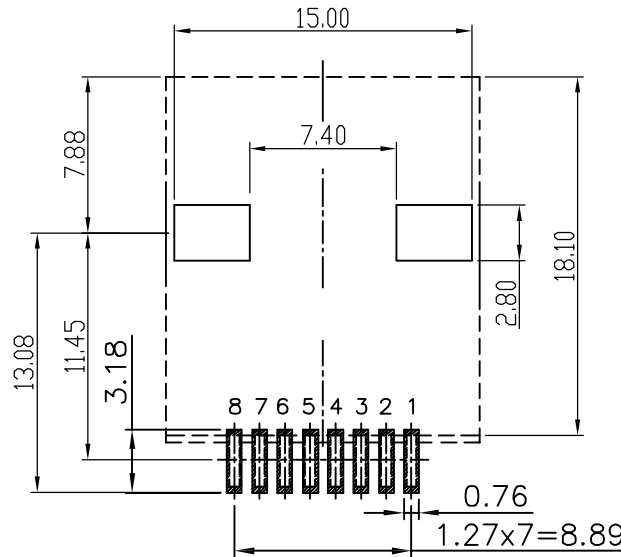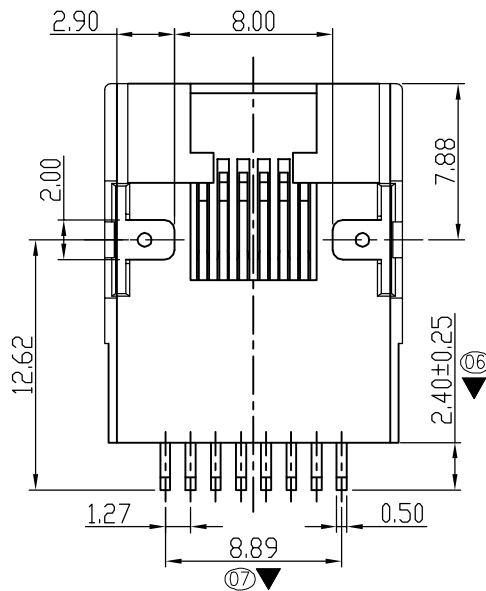

**PCB LAYOUT/TOP VIEW**

序号	品名规格	料号	备注
1	RJ45 18.1 SMT 全塑 带内贴脚 1-3U"		
2			

DETACHED LISTS 第三角视图 	公差: TOLERANCES (INCH) MM .0 ± 0.20 .00 ± 0.15 .00 ± 0.075	绘图: (Designed) MIN-D 2017-04-27 审核: (Checked) 批准: (Approved)	<b>东莞市欣旺久电子有限公司</b>	
	角度 (ANGLES) ± 1.5°	材料: SEE NOTES 比例: 1:1 (SCALE)	系列 (SERIES) RJ	名称 (NAME) RJ45 18.1 SMT 全塑 带内贴脚
			图号 (DWG NO.): 料号 (PART NO.):	版本 REV. AO
			单位 (UNIT): MM 共 (SHEET) 1 页 第 (OF) 1 页	