

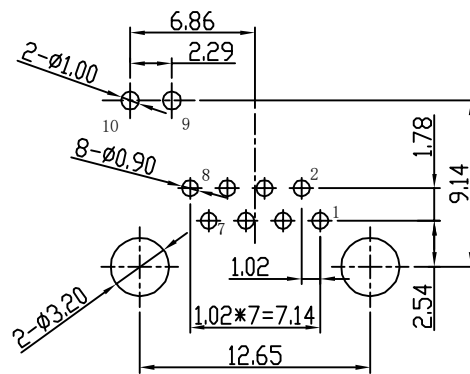
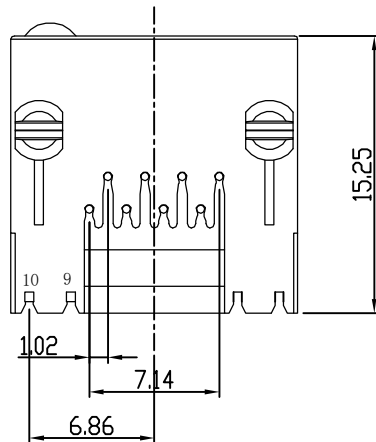
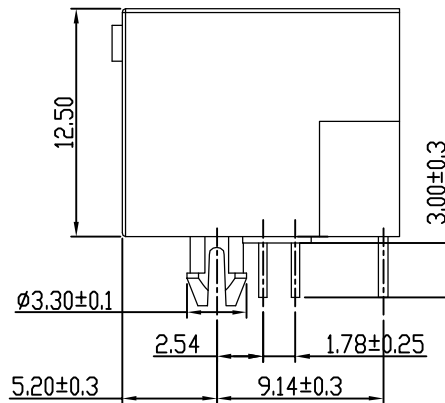


| | | | |
|------|---------|-------|------------|
| REV. | ECN.NO. | NAME | DATA |
| A0 | NEW | MIN-D | 2021-01-12 |

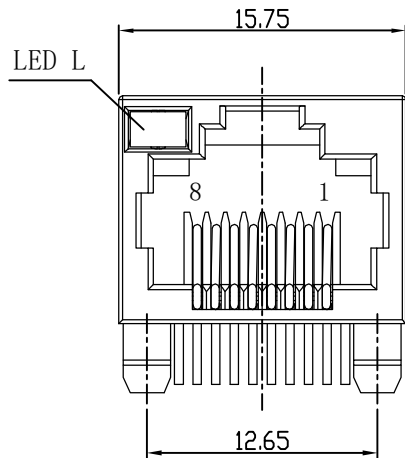

Recommend PCB Layout
(Jack Top View)
TOLERANCES: ±0.05



SPECIFICATION NOTES:

ELECTRICAL:

- VOLTAGE RATING: 125 VAC RMS
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 30mΩ MAX.
- INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
- DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

- HOUSING MATERIAL:
SEE PART NUMBER.
- CONTACTS: φ0.46mm PHOSPHOR BRONZE, GOLD PLATING OVER NICKEL
- OPERATING LIFE: 750 CYCLES MIN.
- MATING FORCE: 30N MAX.
UNMATING FORCE: 30N MAX.

ENVIRONMENTAL:

- STORAGE: -40°C TO +85°C
- OPERATION: -40°C TO +85°C

PART NUMBER:

5J-XX 88 X X X 1-D

1x1: 11
8P8C: 88
Fu": 1
1u": 2
3u": 3
6u": 4
15u": 5
30u": 6
50u": 7

Plating
电镀

D: 左绿/右无灯
0: 无外壳 无灯
1: 无外壳 带灯
2: 有外壳 带灯带EMI
3: 有外壳 带灯无EMI
4: 有外壳 无灯带EMI
5: 有外壳 无灯无EMI
COLOR(颜色)
1. BLACK(黑色)
2. GRAY(灰色)
3. BLUE(蓝色)
4. YELLOW(114C黄)
5. WHITE(白色)
6. RED 1797C 红色
Material
材质
A: PBT
B: PA66
C: PA46

| | | | | |
|----------------|--|---|------------------|--|
| DETACHED LISTS | MM (INCH) | 绘图 (Designed) | MIN-D 2021-01-12 | |
| | 公差 TOLERANCES | 审核 (Checked) | | |
| | MM .0 ± 0.20 .00 ± 0.15 .00 ± 0.075 | MM .0 ± 0.38 .00 ± 0.25 .00 ± 0.15 | 批准 (Approved) | |
| | 角度 (ANGLES) ± 1.5° | 材料 (Material) | SEE NOTES | |
| | 第三角视图 | 比例 (SCALE) | 1:1 | |

| | |
|---|--------------------------|
| XWJ 东莞市欣旺久电子有限公司 XIN WANG JIU Electronics Co.,Ltd | |
| 系列 (SERIES) | 名称 (NAME) |
| RJ | XWJ-5J 8P8C 全塑 左带灯右无灯 |
| 图号 (DWG NO.): | 版本 (REV.) |
| 料号 (PART NO): 5J-XX88XXX1-D | A0 |
| 单位 (UNIT): MM | 共 (SHEET) 1 页 第 (OF) 1 页 |